

LED T5 Switch Batten



DATA SHEET

Product information

The LED T5 Batten designed to be a direct replacement for conventional battens, with energy savings. It offers multiple installation methods to ease your worries and bring the customer a brand new experience of soft lighting. The luminaire is fitted with an on/off switch for individual operation. The best choice for smooth linear lighting. We offer this range of 8 luminaires in 4 wattages.

Application areas



Office



Retail



Hospitality



Indoor and cove

- Corridors and entrances
- Basements
- Stairwells
- Shelves
- Under-cabinet lighting

Direct replacement for luminaires with fluorescent lamps.

Features

- Ambient temperature: -20°C to +40°C
- Long life: lifetime 30 000hrs @L70
- High color rendering: CRI>80
- High efficiency: up to 100lm/w
- Environmental: save up to 60% energy
- Beam angle: 170°
- Class: II
- IP20
- IK02

Benefits

- Easy to install , requires small space due to compact size
- Seamless linear lighting without dark spots
- Cost-effective solution, offers up to 50% energy-saving benefits especially with 4,5W and 8W when replacing 8W and 13W T5 tubes


Specification

Product Code	Description	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	CCT (K)	Power Factor	Energy Class	Dimension (mm)	n max	DS pair	Current (mA)
93108068	LED Batten G1 TU IP20 4.5W 1ft 830 S	4.5	350	78	3000	0.8	A++	311.5x25.9x37.3	19	-	50
93107521	LED Batten G1 TU IP20 4.5W 1ft 840 S	4.5	400	89	4000	0.8	A++	311.5x25.9x37.3	19	93103646	50
-	LED Batten G1 TU IP20 4.5W 1ft 865 S	4.5	400	89	6500	0.8	A++	311.5x25.9x37.3	19	93103726	50
93108069	LED Batten G1 TU IP20 8W 2ft 830 S	8	750	94	3000	0.9	A++	581.5x25.9x37.3	15	-	44
93107522	LED Batten G1 TU IP20 8W 2ft 840 S	8	800	100	4000	0.9	A++	581.5x25.9x37.3	15	93103647	44
-	LED Batten G1 TU IP20 8W 2ft 865 S	8	800	100	6500	0.9	A++	581.5x25.9x37.3	15	93103727	44
93108070	LED Batten G1 TU IP20 12W 3ft 830 S	12	1100	92	3000	0.9	A+	881.5x25.9x37.3	10	-	66
93107523	LED Batten G1 TU IP20 12W 3ft 840 S	12	1200	100	4000	0.9	A++	881.5x25.9x37.3	10	93103648	66
-	LED Batten G1 TU IP20 12W 3ft 865 S	12	1200	100	6500	0.9	A++	881.5x25.9x37.3	10	93103728	66
93108071	LED Batten G1 TU IP20 16W 4ft 830 S	16	1450	91	3000	0.9	A+	1181.5x25.9x37.3	8	-	88
93107524	LED Batten G1 TU IP20 16W 4ft 840 S	16	1550	97	4000	0.9	A+	1181.5x25.9x37.3	8	93103649	88
-	LED Batten G1 TU IP20 16W 4ft 865 S	16	1550	97	6500	0.9	A+	1181.5x25.9x37.3	8	93103729	88

Common attributes

- Not dimmable
- Nominal voltage: 220-240V
- Operation mode: ECG
- Frequency: 50/60 Hz

Dimensions [mm] and weight (kg)

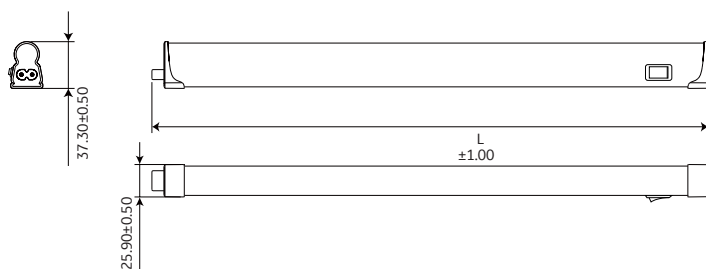

Product Code	Description	L (mm)	Weight (kg)
93108068	LED Batten G1 TU IP20 4.5W 1ft 830 S	311.5	0.07
93107521	LED Batten G1 TU IP20 4.5W 1ft 840 S	311.5	0.07
-	LED Batten G1 TU IP20 4.5W 1ft 865 S	311.5	0.07
93108069	LED Batten G1 TU IP20 8W 2ft 830 S	581.5	0.11
93107522	LED Batten G1 TU IP20 8W 2ft 840 S	581.5	0.11
-	LED Batten G1 TU IP20 8W 2ft 865 S	581.5	0.11
93108070	LED Batten G1 TU IP20 12W 3ft 830 S	881.5	0.16
93107523	LED Batten G1 TU IP20 12W 3ft 840 S	881.5	0.16
-	LED Batten G1 TU IP20 12W 3ft 865 S	881.5	0.16
93108071	LED Batten G1 TU IP20 16W 4ft 830 S	1181.5	0.21
93107524	LED Batten G1 TU IP20 16W 4ft 840 S	1181.5	0.21
-	LED Batten G1 TU IP20 16W 4ft 865 S	1181.5	0.21

Accessory

Mounting accessories and the below power cord without plug are included in the package



Power cord without plug

Material

Body material: Polycarbonate (PC)
Product colour: Grey

Photometric data

